

■ **Rapid Rout - 2609DL**




***Working Software Optional**



9kW high-power spindle
improving cutting efficiency



Leading Numerical Controller strong
anti-interference and scalability

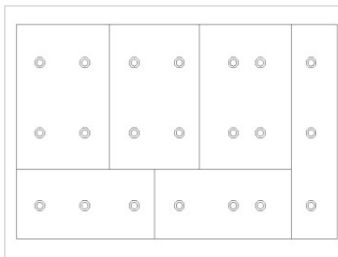

Six partition vacuum adsorption
table, the suction distribution is more
uniform and the small plate is not
easy to deviate




Transmission mechanism: Z axis
adopts ball screw, with high
movement precision and compact
structure.



12 straight row tool warehouse,
automatic tool-change, suitable for
panel furniture production



1.5kW absolute value servo drive,
no need to return to zero when
starting, fast speed and high
efficiency

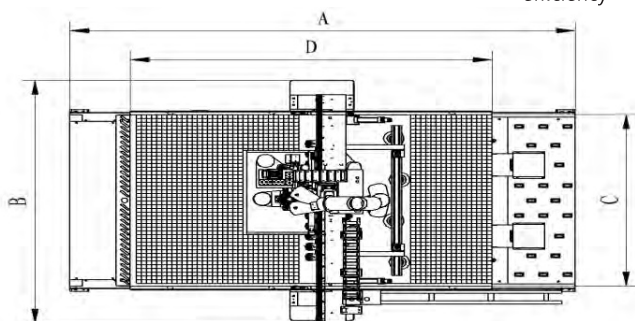

Model	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)
KN-2609DL	4080	2800	1860	2850	2450

Note: "H" is Height

MODEL	Rapid Rout 2609DL
Processing size	2850mmx 1860mm x 40mm
OS	LNC
Driven system	INVT
Vacuum suction speed	500m ³ /h
Vacuum chamber	6
Vacuum Capacity	250 x 2m ³ /h
Spindle	9kW
Drill	10V
Tool magazine	12 post Linear ATC
Size and Dust Outlet	Ø150mm x 1
Suction inlet	Ø141mm x 1
Suction Air Volume	5500 CMH
Air Consumption	200L/min
Drive Power	1.5Kw x 4
Max displacement speed	X axis: 80(m/min); Y axis: 80(m/min);Z axis:30(m/min)
Air pressure	0.65MPa
Auto-loading	Option (KHA 2609)
Auto-unloading	Option (KHA 9609)
Labeling Machine	Option (KHA 1612TS)
Packing size (LxWxH)	5300 x 2320 x 2200 mm
Overall size (LxWxH)	3980 x 3500 x 2450mm
Total Power	28.2Kw
Gross weight	3000kg
Voltage	415V/50Hz/3P

10V drill set

